


THRU-STUDTM



FIXING NOTE



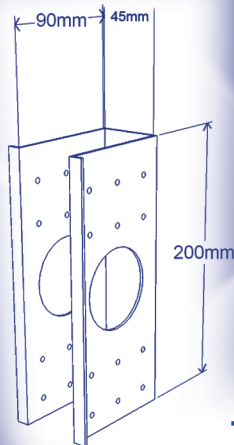

1. Bracket needs to be installed firmly up against the stud and all holes nailed off before drilling service duct hole.
2. Galv. Bracket 30mm x 3.15 dia hot dip galvanised nails to be used in NZ.
3. Galv. Bracket 35mm x 3.15 dia hot dip galvanised nails to be used in Australia.
4. Nail ALL holes.
5. Maximum hole cut is 59mm dia. in 90mm X 45mm stud when using THRU-STUDTM brackets.
6. Use TS90 on 90mm x 45mm wall studs.
7. No limitation on where THRU-STUDTM brackets may be installed along the length of stud.
8. THRU-STUDTM can be installed anywhere along the length of the stud. Where multiple brackets are required;
 - Brackets must be installed at a minimum spacing of 1500 mm between centres; or
 - In the bottom quarter of the stud two brackets can be installed at minimum 300 mm centres. In this situation the number of brackets are limited to two brackets per stud.
9. THRU-STUDTM can be used on any stud length that complies with the NZS3604 or AS1684.2-2011.
10. NOT TO BE USED IN EXTERIOR APPLICATIONS.
11. Nails are not provided.
12. The purchaser is responsible for checking that THRU-STUDTM brackets are suitable for its intended use.



TS90
(thru 90mm Stud)

NZ Reg. Designs	Aust. Reg Designs
410058	318486
410059	318487
410060	318488
410061	318489



-  No limitation on where THRU-STUDTM brackets may be installed along the length of stud.v
-  Multiple THRU-STUDTM brackets can be installed. (Refer fixing notes).
-  THRU-STUDTM can be used on any stud length that complies with the NZS3604 or AS1684.2-2700.v
-  Alternative BRANZ Appraised Solution to NZS 3604:1999 and Australian Standard AS 1684.2-2700.

The full range of brackets is available from leading building and plumbing supply merchants.

Designed and Marketed by BRACE-IT LIMITED, PO BOX 558, Whangaparaoa, Auckland 0943 NZ.
 Phone **+64 9 424 0916** Fax **+64 9 424 0475** email info@brace-it.com